



COMBiLiFT

THE Solution to your Live Receiving Handling Problems



BENEFITS:

- Small Turning Radius
- Operates Indoor And Outdoor
- Reduced Maintenance Costs
- No Mechanical Brakes To Adjust Or Replace
- Minimized Tire Spin
- Visibility-Offset Driving Position Gives Excellent View Of Poultry Cage

FEATURES:

- 3 Wheel Maneuverability
- Fully Hydrostatic Drive
- Traction- All Wheel Drive
- Solid/Soft Tires
- Fully Enclosed Spacious Cab
- Deep Suspension Seat
- Back Up Alarm
- 8" Side Shift



COMBi - LR
Live Receiving Combilift




www.COMBiLiFT.com



SPECIFICATIONS

COMBi - LR

| | DESCRIPTION | STD |
|----|---|------------------------|
| 1 | Standard Lift Height | 126" |
| 2 | Height Mast Closed | 101 ½" |
| 3 | Max. (Mast raised) | 163 ¾" |
| 4 | Length From Face of Fork | 97 ½" |
| 5 | Ground Clearance Under Mast | 12" |
| 6 | Ground Clearance to Center of Wheelbase | 10" |
| 7 | Height Over Cab (Without work - lights) | 102" |
| 8 | Outside Spread of Fork Arms | 39 ¼" |
| 9 | Track Front | 78 ½" |
| 10 | Width | 88 ¼" |
| 11 | Load Center Distance | 48" |
| 12 | Overhang Front | 18 ½" |
| 13 | Wheelbase | 73 ½" |
| 14 | Overhang Back | 5 ½" |
| 15 | Approach Angle | 45° |
| 16 | Ramp Angle | 36° |
| 17 | Departure Angle | 45° |
| 18 | Forward Tilt | 6° |
| 19 | Backward Tilt | 8° |
| 20 | Minimum Outside Radius | 90 ¾" |
| A | Capacity | 5,000 lbs |
| B | Unladen Weight | 13,000 lbs |
| C | Maximum Ground Speed | 10 mph |
| D | Gradeability | 15% |
| E | Kubota V2403 T Diesel | 60HP |
| F | Electrics | 12 Volt |
| G | Fork Section | 2" x 5" x 72" |
| H | 27 x 10 - 12 Front Tires | OD 27" / Width 10" |
| I | 355/65 - 15 Rear Tire | OD 31 ½" / Width 11 ½" |
| J | Standard Color | Green & Grey |
| K | Suspension Seat | KAB Model 116 |

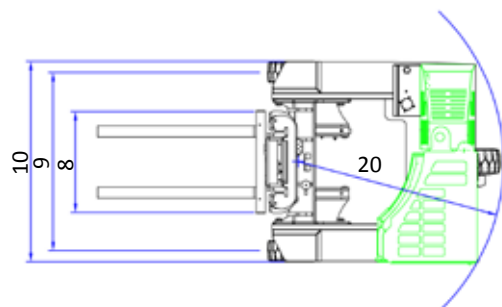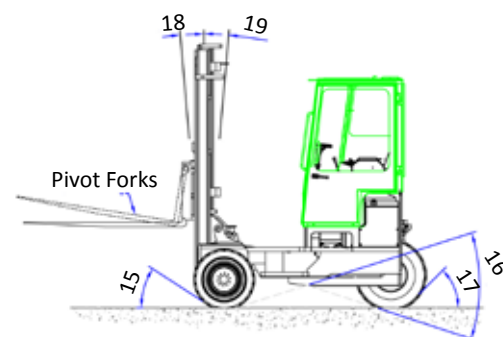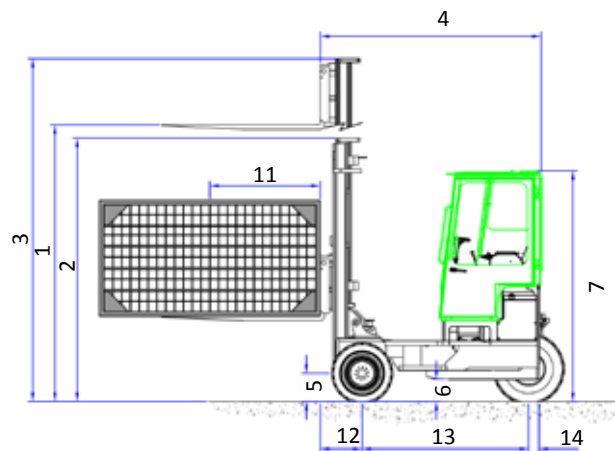

OPTIONS INCLUDE:

- Rotator/ Slope Piler
- 36" Mast Retraction
- Cabin Heater
- Air Conditioning
- Custom Color

Distributed by

www.COMBiLiFT.com



COMBiLiFT USA

303 Concord Street, Greensboro,
North Carolina 27406

Toll Free: 1 - 877 COMBI 56

Tel: 336 - 378 - 8884 Fax: 336 - 378 - 8842

E: info@combilift.com